



Plug-in coupling made of nylon (two-part and three-part)




For legend of pictogram please refer to flapper on the cover



Components

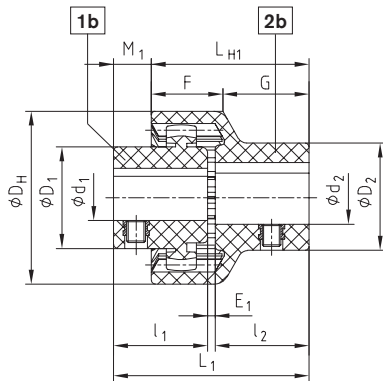

Type junior plug-in coupling (two-part)

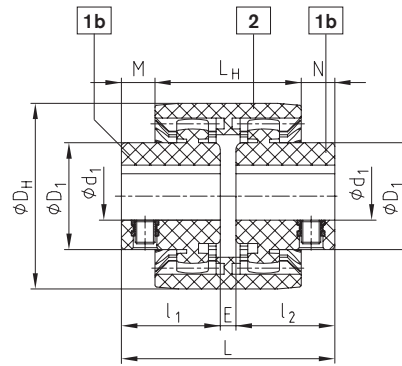

Type junior M coupling (three-part)

BoWex® junior plug-in coupling (two-part) and BoWex® junior M (three-part)																				
Size	Torque [Nm]		Finish bore				Dimensions [mm]											Max. speed [rpm]		
			Hub Component 1b ¹⁾		Plug-in sleeve Component 2b ¹⁾		D _H	l ₁ , l ₂	E ₁	L ₁	L _{H1}	M ₁	F	G	E	L	L _H		M, N	
	d ₁ ¹⁾	D ₁	d ₂ ¹⁾	D ₂																
14	5	10	Ø6, Ø7, Ø8, Ø9	22	Ø6, Ø7, Ø8	22	40	23	2	48	40	8	18.5	21.5	4	50	37	6.5	6000	
M-14			Ø10, Ø11	25	Ø10, Ø11	25														
			Ø12, Ø14	26	Ø12, Ø14	26														
19	8	16	Ø10, Ø11, Ø12, Ø14	27	Ø12, Ø14	29	47	25	2	52	42	10	19.0	23.0	4	54	37	8.5	6000	
M-19			Ø15, Ø16	30	Ø15, Ø16	30														
			Ø19	32	Ø19	35														
24	12	24	Ø10, Ø11, Ø12	26	Ø14, Ø16	32	53	26	2	54	45	9	21.5	23.5	4	56	41	7.5	6000	
M-24			Ø14, Ø15, Ø16	32																
			Ø18, Ø19, Ø20	36		Ø19, Ø20														36
			Ø24	38	Ø24	40														

¹⁾ Finish bore with tolerance +0.05/-0.1; feather keyway ±0.08

Ordering example:	BoWex® junior 19	d ₁ Ø19	d ₂ Ø14
	Coupling size of two-part type or BoWex® junior M-19 three-part type	Finish bore	Finish bore