


# ROTEX® Flexible jaw couplings

## Properties of standard spiders


ROTEX® 14




ROTEX® 19




ROTEX® 24 - 65




ROTEX® 75 - 160



ROTEX® 180



### Degree of hardness



Spider type (Shore hardness)	92 Shore A (T-PUR®)	92 Shore A
	 <b>T-PUR®</b>	
Size	14 to 180	14 to 90
Material	T-PUR®	Polyurethane (PUR)
Permissible temperature range		
Permanent temperature	-40 °C to +120 °C	-40 °C to +90 °C
Short-term temperature	-40 °C to +150 °C	-40 °C to +120 °C
Properties	<ul style="list-style-type: none"> <li>- significantly higher service life expectancy</li> <li>- very good temperature resistance</li> <li>- improved damping of vibrations</li> <li>- good damping, medium flexibility</li> <li>- suitable for all hub materials</li> </ul>	<ul style="list-style-type: none"> <li>- good damping, medium flexibility</li> <li>- suitable for all hub materials</li> </ul>

Spider type (Shore hardness)	98 Shore A (T-PUR®)	98 Shore A
	 <b>T-PUR®</b>	
Size	14 to 180	14 to 90
Material	T-PUR®	Polyurethane (PUR)
Permissible temperature range		
Permanent temperature	-40 °C to +120 °C	-30 °C to +90 °C
Short-term temperature	-40 °C to +150 °C	-40 °C to +120 °C
Properties	<ul style="list-style-type: none"> <li>- significantly higher service life expectancy</li> <li>- very good temperature resistance</li> <li>- improved damping of vibrations</li> <li>- transmission of high torques with average damping</li> <li>- recommended hub material: steel, GJL and GJS</li> </ul>	<ul style="list-style-type: none"> <li>- transmission of high torques with average damping</li> <li>- recommended hub material: steel, GJL and GJS</li> </ul>

Spider type (Shore hardness)	64 Shore D (T-PUR®)
	 <b>T-PUR®</b>
Size	14 to 180
Material	T-PUR®
Permissible temperature range	
Permanent temperature	-40 °C to +120 °C
Short-term temperature	-40 °C to +150 °C
Properties	<ul style="list-style-type: none"> <li>- significantly higher service life expectancy</li> <li>- very good temperature resistance</li> <li>- improved damping of vibrations</li> <li>- transmission of very high torques with low damping</li> <li>- recommended hub material: steel and GJS</li> </ul>

Technical data of standard spiders

92 Shore A spider made of T-PUR® and PUR														
ROTEX® size	Torsion angle $\phi$ with		Torque [Nm]					Damping power P <sub>KW</sub> [W] <sup>3)</sup>	Relative damping $\psi$	Resonance factor V <sub>R</sub>	Torsion spring stiffness C dyn. [Nm/rad]			
	T <sub>KN</sub>	T <sub>K max</sub>	DIN 740 <sup>1)</sup>			T <sub>K max</sub> <sup>2)</sup>	1.0 T <sub>KN</sub>				0.75 T <sub>KN</sub>	0.5 T <sub>KN</sub>	0.25 T <sub>KN</sub>	
			Rated T <sub>KN</sub>	Max. T <sub>K max</sub>	Vibratory T <sub>KW</sub>									
14	6.4°	10°	7.5	15	2.0	22.5	–			0.38x10 <sup>3</sup>	0.31x10 <sup>3</sup>	0.24x10 <sup>3</sup>	0.14x10 <sup>3</sup>	
19			10	20	2.6	30	4.8			1.28x10 <sup>3</sup>	1.05x10 <sup>3</sup>	0.8x10 <sup>3</sup>	0.47x10 <sup>3</sup>	
24			35	70	9.1	105	6.6			4.86x10 <sup>3</sup>	3.98x10 <sup>3</sup>	3.01x10 <sup>3</sup>	1.79x10 <sup>3</sup>	
28			95	190	25	285	8.4			10.9x10 <sup>3</sup>	8.94x10 <sup>3</sup>	6.76x10 <sup>3</sup>	4.01x10 <sup>3</sup>	
38			190	380	49	570	10.2			21.05x10 <sup>3</sup>	17.26x10 <sup>3</sup>	13.05x10 <sup>3</sup>	7.74x10 <sup>3</sup>	
42			265	530	69	795	12.0			23.74x10 <sup>3</sup>	19.47x10 <sup>3</sup>	14.72x10 <sup>3</sup>	8.73x10 <sup>3</sup>	
48			310	620	81	930	13.8			36.7x10 <sup>3</sup>	30.09x10 <sup>3</sup>	22.75x10 <sup>3</sup>	13.49x10 <sup>3</sup>	
55			410	820	107	1230	15.6			50.7x10 <sup>3</sup>	41.59x10 <sup>3</sup>	31.45x10 <sup>3</sup>	18.64x10 <sup>3</sup>	
65	3.2°	5°	625	1250	163	1875	18.0	0.80	7.90	97.1x10 <sup>3</sup>	79.65x10 <sup>3</sup>	60.2x10 <sup>3</sup>	35.7x10 <sup>3</sup>	
75			1280	2560	333	3840	21.6			113.3x10 <sup>3</sup>	92.9x10 <sup>3</sup>	70.3x10 <sup>3</sup>	41.65x10 <sup>3</sup>	
90			2400	4800	624	7200	30.0			190.1x10 <sup>3</sup>	155.9x10 <sup>3</sup>	117.9x10 <sup>3</sup>	69.9x10 <sup>3</sup>	
100			3300	6600	858	9900	36.0			253.1x10 <sup>3</sup>	207.5x10 <sup>3</sup>	156.9x10 <sup>3</sup>	93x10 <sup>3</sup>	
110			4800	9600	1248	14400	42.0			415.5x10 <sup>3</sup>	336.9x10 <sup>3</sup>	257.6x10 <sup>3</sup>	177.4x10 <sup>3</sup>	
125			6650	13300	1729	19950	48.0			647.7x10 <sup>3</sup>	537.3x10 <sup>3</sup>	412.2x10 <sup>3</sup>	277.5x10 <sup>3</sup>	
140			8550	17100	2223	25650	54.6			813.4x10 <sup>3</sup>	670.2x10 <sup>3</sup>	519.7x10 <sup>3</sup>	351.7x10 <sup>3</sup>	
160			12800	25600	3328	38400	75.0			1298x10 <sup>3</sup>	1104x10 <sup>3</sup>	901.9x10 <sup>3</sup>	655.7x10 <sup>3</sup>	
180			18650	37300	4849	55950	78.0			2327x10 <sup>3</sup>	1981x10 <sup>3</sup>	1618x10 <sup>3</sup>	1176x10 <sup>3</sup>	

98 Shore A spider made of T-PUR® and PUR														
ROTEX® size	Torsion angle $\phi$ with		Torque [Nm]					Damping power P <sub>KW</sub> [W] <sup>3)</sup>	Relative damping $\psi$	Resonance factor V <sub>R</sub>	Torsion spring stiffness C dyn. [Nm/rad]			
	T <sub>KN</sub>	T <sub>K max</sub>	DIN 740 <sup>1)</sup>			T <sub>K max</sub> <sup>2)</sup>	1.0 T <sub>KN</sub>				0.75 T <sub>KN</sub>	0.5 T <sub>KN</sub>	0.25 T <sub>KN</sub>	
			Rated T <sub>KN</sub>	Max. T <sub>K max</sub>	Vibratory T <sub>KW</sub>									
14	6.4°	10°	12.5	25	3.3	37.5	–			0.56x10 <sup>3</sup>	0.46x10 <sup>3</sup>	0.35x10 <sup>3</sup>	0.21x10 <sup>3</sup>	
19			17	34	4.4	51	4.8			2.92x10 <sup>3</sup>	2.39x10 <sup>3</sup>	1.81x10 <sup>3</sup>	1.07x10 <sup>3</sup>	
24			60	120	16	180	6.6			9.93x10 <sup>3</sup>	8.14x10 <sup>3</sup>	6.16x10 <sup>3</sup>	3.65x10 <sup>3</sup>	
28			160	320	42	480	8.4			26.77x10 <sup>3</sup>	21.95x10 <sup>3</sup>	16.6x10 <sup>3</sup>	9.84x10 <sup>3</sup>	
38			325	650	85	975	10.2			48.57x10 <sup>3</sup>	39.83x10 <sup>3</sup>	30.11x10 <sup>3</sup>	17.85x10 <sup>3</sup>	
42			450	900	117	1350	12.0			54.5x10 <sup>3</sup>	44.69x10 <sup>3</sup>	33.79x10 <sup>3</sup>	20.03x10 <sup>3</sup>	
48			525	1050	137	1575	13.8			65.3x10 <sup>3</sup>	53.54x10 <sup>3</sup>	40.48x10 <sup>3</sup>	24x10 <sup>3</sup>	
55			685	1370	178	2055	15.6			95x10 <sup>3</sup>	77.9x10 <sup>3</sup>	58.88x10 <sup>3</sup>	34.9x10 <sup>3</sup>	
65	3.2°	5°	940	1880	244	2820	18.0	0.80	7.90	129.5x10 <sup>3</sup>	106.2x10 <sup>3</sup>	80.3x10 <sup>3</sup>	47.6x10 <sup>3</sup>	
75			1920	3840	499	5760	21.6			197.5x10 <sup>3</sup>	162x10 <sup>3</sup>	122.5x10 <sup>3</sup>	72.6x10 <sup>3</sup>	
90			3600	7200	936	10800	30.0			312.2x10 <sup>3</sup>	256x10 <sup>3</sup>	193.6x10 <sup>3</sup>	114.7x10 <sup>3</sup>	
100			4950	9900	1287	14850	36.0			383.3x10 <sup>3</sup>	314.3x10 <sup>3</sup>	237.6x10 <sup>3</sup>	140.9x10 <sup>3</sup>	
110			7200	14400	1872	21600	42.0			805.9x10 <sup>3</sup>	663.1x10 <sup>3</sup>	515.3x10 <sup>3</sup>	360.5x10 <sup>3</sup>	
125			10000	20000	2600	30000	48.0			1207x10 <sup>3</sup>	1003x10 <sup>3</sup>	787.6x10 <sup>3</sup>	552.5x10 <sup>3</sup>	
140			12800	25600	3328	38400	54.6			1549x10 <sup>3</sup>	1283x10 <sup>3</sup>	979.8x10 <sup>3</sup>	674.1x10 <sup>3</sup>	
160			19200	38400	4992	57600	75.0			2481x10 <sup>3</sup>	2137x10 <sup>3</sup>	1781x10 <sup>3</sup>	1275x10 <sup>3</sup>	
180			28000	56000	7280	84000	78.0			4220x10 <sup>3</sup>	3635x10 <sup>3</sup>	3031x10 <sup>3</sup>	2170x10 <sup>3</sup>	



64 Shore D spider made of T-PUR®														
ROTEX® size	Torsion angle $\phi$ with		Torque [Nm]					Damping power P <sub>KW</sub> [W] <sup>3)</sup>	Relative damping $\psi$	Resonance factor V <sub>R</sub>	Torsion spring stiffness C dyn. [Nm/rad]			
	T <sub>KN</sub>	T <sub>K max</sub>	DIN 740 <sup>1)</sup>			T <sub>K max</sub> <sup>2)</sup>	1.0 T <sub>KN</sub>				0.75 T <sub>KN</sub>	0.5 T <sub>KN</sub>	0.25 T <sub>KN</sub>	
			Rated T <sub>KN</sub>	Max. T <sub>K max</sub>	Vibratory T <sub>KW</sub>									
14	4.5°	7.0°	16	32	4.2	48	9.0			0.76x10 <sup>3</sup>	0.62x10 <sup>3</sup>	0.47x10 <sup>3</sup>	0.28x10 <sup>3</sup>	
19			21	42	5.5	63	7.2			5.35x10 <sup>3</sup>	4.39x10 <sup>3</sup>	3.32x10 <sup>3</sup>	1.97x10 <sup>3</sup>	
24			75	150	19.5	225	9.9			15.11x10 <sup>3</sup>	12.39x10 <sup>3</sup>	9.37x10 <sup>3</sup>	5.55x10 <sup>3</sup>	
28			200	400	52	600	12.6			27.52x10 <sup>3</sup>	22.57x10 <sup>3</sup>	17.06x10 <sup>3</sup>	10.12x10 <sup>3</sup>	
38			405	810	105	1215	15.3			70.15x10 <sup>3</sup>	57.52x10 <sup>3</sup>	43.49x10 <sup>3</sup>	25.78x10 <sup>3</sup>	
42			560	1120	146	1680	18.0			79.9x10 <sup>3</sup>	65.5x10 <sup>3</sup>	49.52x10 <sup>3</sup>	29.35x10 <sup>3</sup>	
48			655	1310	170	1965	20.7			95.5x10 <sup>3</sup>	78.3x10 <sup>3</sup>	59.22x10 <sup>3</sup>	35.1x10 <sup>3</sup>	
55			825	1650	215	2475	23.4			107.9x10 <sup>3</sup>	88.5x10 <sup>3</sup>	66.9x10 <sup>3</sup>	39.66x10 <sup>3</sup>	
65	2.5°	3.6°	1175	2350	306	3525	27.0	0.75	8.50	151.1x10 <sup>3</sup>	123.9x10 <sup>3</sup>	93.7x10 <sup>3</sup>	55.53x10 <sup>3</sup>	
75			2400	4800	624	7200	32.4			248.2x10 <sup>3</sup>	203.5x10 <sup>3</sup>	153.9x10 <sup>3</sup>	91.2x10 <sup>3</sup>	
90			4500	9000	1170	13500	45.0			674.5x10 <sup>3</sup>	553.1x10 <sup>3</sup>	418.2x10 <sup>3</sup>	247.9x10 <sup>3</sup>	
100			6185	12370	1608	18555	54.0			861.2x10 <sup>3</sup>	706.2x10 <sup>3</sup>	533.9x10 <sup>3</sup>	316.5x10 <sup>3</sup>	
110			9000	18000	2340	27000	63.0			1230x10 <sup>3</sup>	1001x10 <sup>3</sup>	773.1x10 <sup>3</sup>	531.4x10 <sup>3</sup>	
125			12500	25000	3250	37500	72.0			1749x10 <sup>3</sup>	1436x10 <sup>3</sup>	1149x10 <sup>3</sup>	832.1x10 <sup>3</sup>	
140			16000	32000	4160	48000	81.9			2312x10 <sup>3</sup>	1929x10 <sup>3</sup>	1521x10 <sup>3</sup>	1082x10 <sup>3</sup>	
160			24000	48000	6240	72000	112.5			3415x10 <sup>3</sup>	2961x10 <sup>3</sup>	2471x10 <sup>3</sup>	1830x10 <sup>3</sup>	
180			35000	70000	9100	105000	117.0			5670x10 <sup>3</sup>	4917x10 <sup>3</sup>	4103x10 <sup>3</sup>	3038x10 <sup>3</sup>	

<sup>1)</sup> see catalogue page 15  
<sup>2)</sup> ≤ 1000 load cycles  
<sup>3)</sup> with +30 °C

Temperature factor S <sub>t</sub>										
	-40 °C +30 °C	+40 °C	+50 °C	+60 °C	+70 °C	+80 °C	+90 °C	+100 °C	+110 °C	+120 °C
T-PUR®	1.0	1.0	1.2	1.3	1.45	1.6	1.8	2.1	2.5	3.0
PUR	1.0	1.0	1.3	1.4	1.55	1.8	2.2	–	–	–

With temperatures below -40 °C please consult with KTR.  
 Unless the Shore hardness of spider is explicitly specified in your order, we will supply spiders with Shore hardness 92 Shore A T-PUR®.  
 For circumferential speeds exceeding v = 30 m/s dynamic balancing is required. For circumferential speeds exceeding v = 35 m/s only steel or nodular iron.

### Technical data and properties of special spiders

		
Description	PA	PEEK
Material	Polyamide	Polyetheretherketone
Permissible temperature range Permanent temperature Short-term temperature	-40 °C to +100 °C <sup>1)</sup> -40 °C to +120 °C <sup>1)</sup>	up to +180 °C up to +250 °C
Properties	<ul style="list-style-type: none"> <li>- small twisting angle and high torsion spring stiffness</li> <li>- transmission of very high torques with very low damping</li> <li>- good resistance to chemicals <sup>1)</sup></li> <li>- recommended hub material: steel</li> <li>- high restoring forces with displacements</li> </ul>	<ul style="list-style-type: none"> <li>- small twisting angle and high torsion spring stiffness</li> <li>- transmission of very high torques with very low damping</li> <li>- highly temperature-resistant, resistant to hydrolysis</li> <li>- good resistance to chemicals</li> <li>- recommended hub material: steel</li> <li>- high restoring forces with displacements</li> </ul>


<sup>1)</sup> different properties depending on compound

Torques			
ROTEX® size	PA, PEEK		
	T <sub>KN</sub> [Nm]	T <sub>K max</sub> [Nm]	T <sub>KW</sub> [Nm]
14	22	44	5.5
19	30	60	8.0
24	105	210	27.5
28	280	560	73
38	565	1130	147
42	785	1570	204
48	915	1830	238
55	1200	2400	312
65	1645	3290	427
75	2560	5130	667
90	6300	12600	1640
100	8650	17300	2250
110	10500	21000	2730
125	13000	26000	3380

Temperature factor S <sub>t</sub>										
	-40 °C +30 °C	+40 °C	+50 °C	+60 °C	+70 °C	+80 °C	+90 °C	+100 °C	+110 °C	+120 °C
PA	1.0	1.0	1.0	1.0	1.2	1.4	1.6	–	–	–
PEEK	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0

With temperatures below -40 °C please consult with KTR.

### Installation of spider

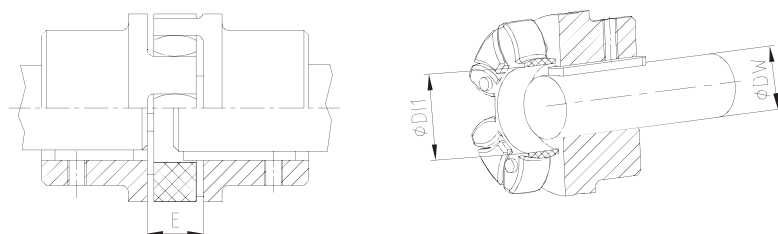

Shaft ØDW with feather key (acc. to DIN 6885 sheet 1) protruding into the spider ØD1

Mounting dimensions																	
ROTEX® size	14	19	24	28	38	42	48	55	65	75	90	100	110	125	140	160	180
Distance dimension E	13	16	18	20	24	26	28	30	35	40	45	50	55	60	65	75	85
Dimension D11	10	18	27	30	38	46	51	60	68	80	100	113	127	147	165	190	220
Dimension DW <sup>2)</sup>	7	12	20	22	28	36	40	48	55	65	80	95	100	120	135	160	185

<sup>2)</sup> If the shaft diameter is smaller than or equal to dimension D11, one shaft end or both shaft ends may protrude with the feather keyway into the spider.