

Vacuum Pad 진공패드

IP series

IP series

SUCTION CUP WITH SOFT RUBBER PROFILE

제품 특징

- 불규칙한 표면의 제품 이송에 적합.
- 얇은 제품 이송시 변형방지가 됨.
- 패드아래 고무의 밀착력이 우수.

적용 / Suitable for Handling

- 합판 Rough Wood
- 벽돌 Bricks
- 석재 Marble



Also used for concave objects Fit for moving thin workpiece Soft cellular rubber provides a good seal against most surfaces.

A ball-jointed mounting should be fitted if bending moments are applied.

Order No.

IP60 - E - 18F

①

②

③

① 크기 Ø [VACUUM PAD]

35	: Ø35
60	: Ø60
80	: Ø80
100	: Ø100
150	: Ø150
200	: Ø200

② 재질 [MATERIAL]

E : EPDM

③ 연결나사 [THREAD SIZE]

X	: NONE
F18F	: PF 1/8 Female (IP35,60,80)
F12F	: PF 1/2 Female (IP80,100,150,200)
F34F	: PF 3/4 Female (IP200)


수직이송력(Kg)

	-20 Kpa	-60 Kpa	-90 Kpa
IP 35	2.04	5.1	7.14
60	6.12	15.3	22.44
80	10.4	26.5	47.8
100	18.36	45.9	67.34
150	38	97	138




IP series


IP35-E-F18F




IP60-E-F18F

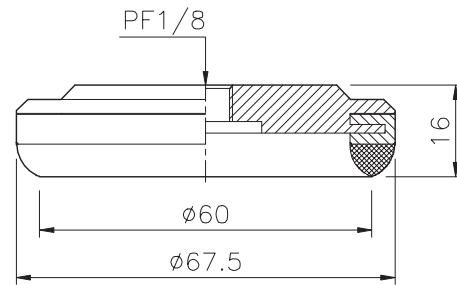


IP80-E-F12F

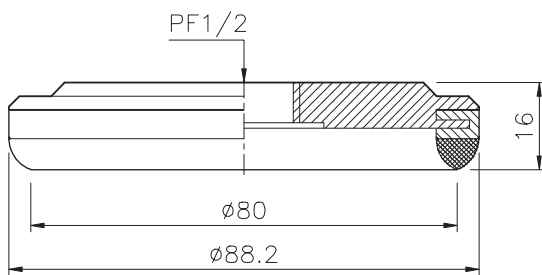

IP80-E-F18F

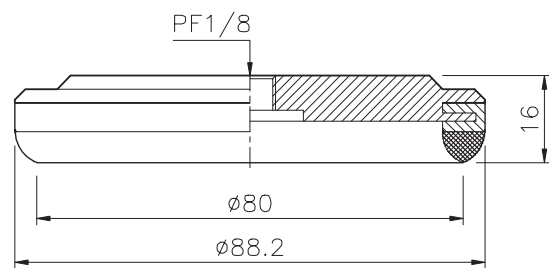

IP100-E-F12F

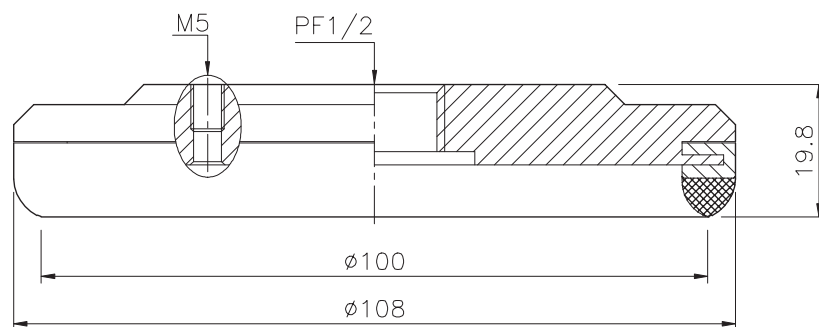

IP150-E-F12F

